


Particular Specification

Item No:	BMS-373BB
Weight:	9.6 grams / 0.38oz
Size:	24.5 x 11.5 x 23 mm / 0.99 x 0.46 x 0.91 inch
Torque At 4.8V:	1.6kg/cm , 22 oz/in
Torque At 6.0V:	
Speed At 4.8V:	0.11sec / 60 deg at no load
Speed At 6.0V:	
Ball Bearing:	Yes, Top of single ball bearing
Gear Type:	FG(Fine Grain +15% M90)
Motor Type:	3 pole magnetic motor
Operating Voltage Range	3.6V~4.8V
Operating Temperature Range	-20°C to +60°C
Idle Current	5mA at Stopped
Running Current	190mA
Stall Current	400mA
Dead Bend Width	6 usec
Direction	Re-clock wise / pulse traveling 1200 to 1600 usec
Horn Gear Spline	25 Segments (Same with Futaba spline)
Connector Wire Length	160mm (6.29in)
Connector Horsing	Universal connector
Wire Info	Brown Wire = Battery Negative Red Wire = Battery Positive Orange Wire = Signal

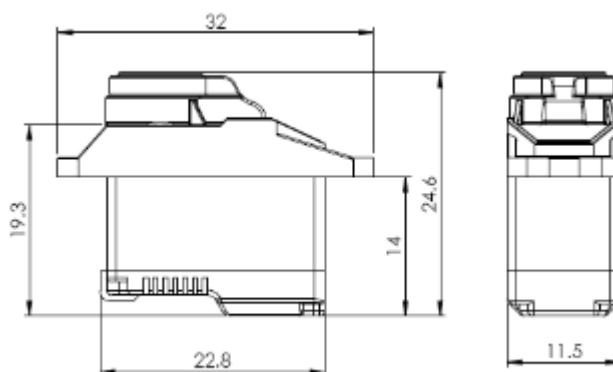

Unit: mm